## Fire truck AZ 3,0-40 (KAMAZ 43502)


Fire truck AZ 3,0-40 (KAMAZ 43502) intended for:

- delivery to the fire site of fire personnel, fire extinguishing substances, fire-technical equipment (FTE) and rescue equipment (RE),

- extinguishing fires and emergency rescue operations, using a fire truck, fire personnel, fire extinguishing, substances, FTE and RE.



	1	
Capacity volume for water, I		from 0 to 3000
Capacity volume for frother, I		180 (other as per customer request)
Overall dimensions (length / height / width), mm		8000x3365x2500
Full mass, kg		12700
Colorography schemes		GOST R 50574-2002 (other as per customer request)
four-door cab, six places; cab front - all-metal standard chassis cabin, two-door, two places cab rear - frame-panel type, four-seater; both parts of the cabin form a common saloon		
water tank, foam tank, fire pump, water and foam communications, body superstructure with compartments for fire-technical equipment and rescue equipment		
normal pressure centrifugal fire pump NZPN-40/100, (according to GOST R 52283-2004 "Centrifugal fire pumps. General technical requirements. Test methods"), rear location (other as per customer request)		
from 0 to 40 liters per second (or another with another fire pump)		
according to the standards of the Order of the Ministry of Emergency Situations of Russia №425 of July 25, 2006 (other as per customer request)		
in the compartments, taking into account the tactics of its operational use, to ensure the reliability of equipment fixation, accessibility, convenience and safety during removal and installation		
Wheel formula / driving wheels 4 x 4 / all		
		ut front, longitudinal, e the engine, loading workspace behind cabin
Wheelbase, mm 4200		
), i		
		36.7E5 285, four-stroke, diesel, Euro-5
Engine power, hp 285		
Maximum speed, km/h 90		
Gearbox (type) mechanic		
Tires (type, size) 425/8		
	four-door cab cab front - all- cab rear - frai both parts of water tank, for body supersti normal press. "Centrifugal fi rear location from 0 to 40 I according to to of July 25, 20 in the compar of equipment	four-door cab, six places; cab front - all-metal standa cab rear - frame-panel type both parts of the cabin form water tank, foam tank, fire body superstructure with c normal pressure centrifuga "Centrifugal fire pumps. Ge rear location (other as per from 0 to 40 liters per seco according to the standards of July 25, 2006 (other as p in the compartments, taking of equipment fixation, acces s

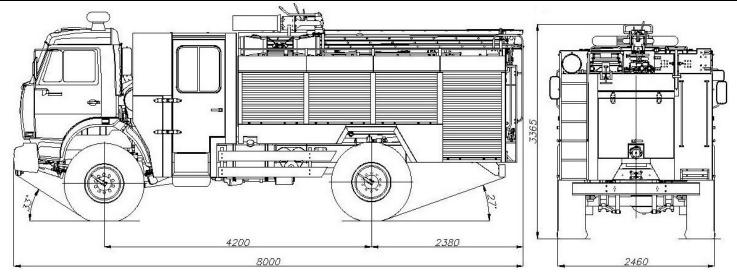

LLC "ARCTODUS" e-mail: voinauri@gmail.com

Mob, WhatsApp, Skype +7-919-0477778 Viber +375-29-7737778 Tel +7-4812-542778